


BOW SHACKLES

Galvanized to BS 3032

S.W.L = 1/6 of breaking load

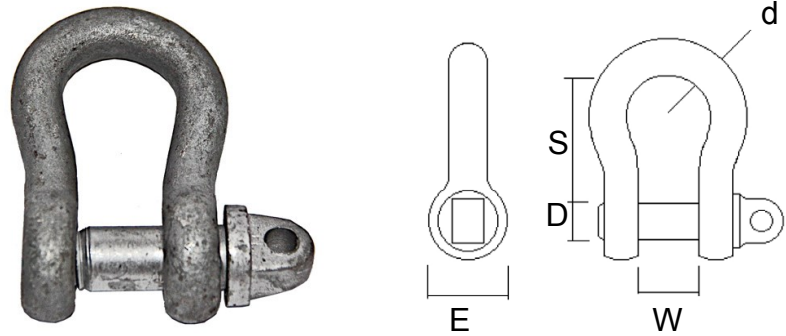

Small Bow (SSB)

| Part No. | Vertical S.W.L Kg | d | D | W | S | B | E |
|-----------|-------------------|----|----|----|----|----|----|
| 2/SSB/001 | 203 | 6 | 10 | 13 | 25 | 16 | 19 |
| 2/SSB/002 | 504 | 10 | 13 | 16 | 38 | 22 | 25 |
| 2/SSB/003 | 1016 | 13 | 16 | 22 | 51 | 28 | 32 |
| 2/SSB/004 | 1524 | 16 | 19 | 28 | 64 | 38 | 38 |
| 2/SSB/005 | 2032 | 19 | 22 | 34 | 76 | 44 | 44 |

Large Bow (SLB)

| Part No. | Vertical S.W.L Kg | d | D | W | S | B | E |
|-----------|-------------------|----|----|----|----|----|----|
| 2/SLB/001 | 152 | 6 | 10 | 13 | 28 | 19 | 19 |
| 2/SLB/002 | 457 | 10 | 13 | 16 | 41 | 25 | 25 |
| 2/SLB/003 | 762 | 13 | 16 | 22 | 54 | 32 | 32 |
| 2/SLB/004 | 1270 | 16 | 19 | 28 | 70 | 41 | 38 |
| 2/SLB/005 | 2032 | 19 | 22 | 34 | 85 | 51 | 44 |